



PLANVIEW
OVERLAY
HERE

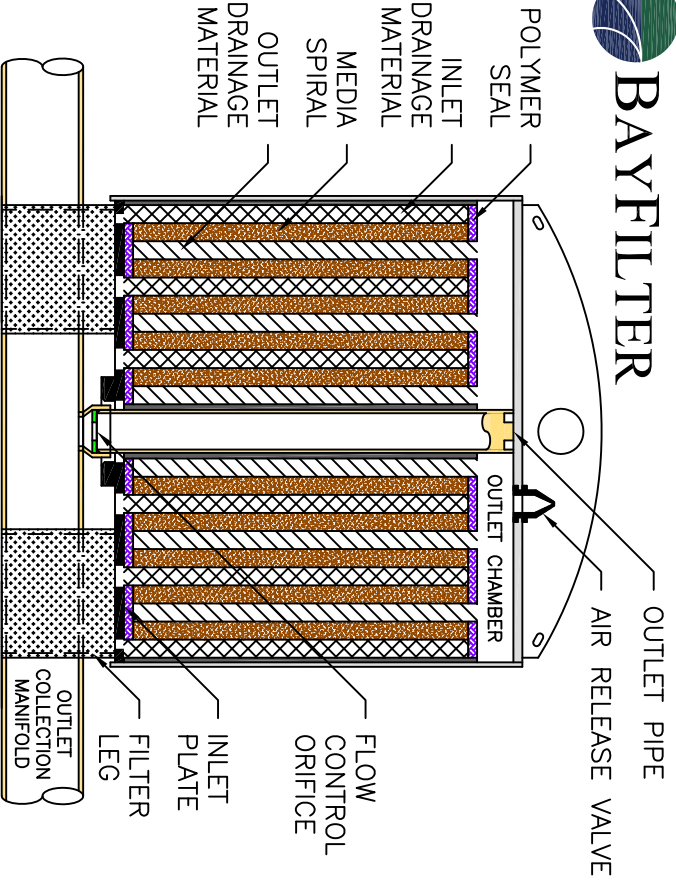

BAYFILTER 545		
84-4 MANHOLE		
PROJECT		
LOCATION		
WATER QUALITY FLOW	0.4 CFS	
DRAINAGE AREA		
CARTRIDGE DESIGN FLOW RATE	45 GPM	
# BAYFILTER CARTRIDGES	4	
TREATED SEDIMENT CAPACITY	1400 LBS	

THE BAYFILTER STORMWATER MANAGEMENT SYSTEM IS A STORMWATER FILTRATION DEVICE DESIGNED TO REMOVE FINE SEDIMENTS, HEAVY METALS, AND PHOSPHORUS. THE BAYFILTER SYSTEM RELIES ON A SPIRAL WOUND MEDIA FILTER CARTRIDGE WITH APPROXIMATELY 90 SQUARE FEET OF FILTRATION AREA. THE FILTER CARTRIDGES ARE HOUSED IN A CONCRETE STRUCTURE THAT EVENLY DISTRIBUTES THE FLOW BETWEEN CARTRIDGES. THE SYSTEM IS OFFLINE WITH AN EXTERNAL BYPASS THAT ROUTES HIGH INTENSITY STORMS AROUND THE SYSTEM. THE FILTER CARTRIDGES REMOVE POLLUTANTS FROM RUNOFF BY FILTRATION (INTERCEPTION/ATTACHMENT) AND ADSORPTION.

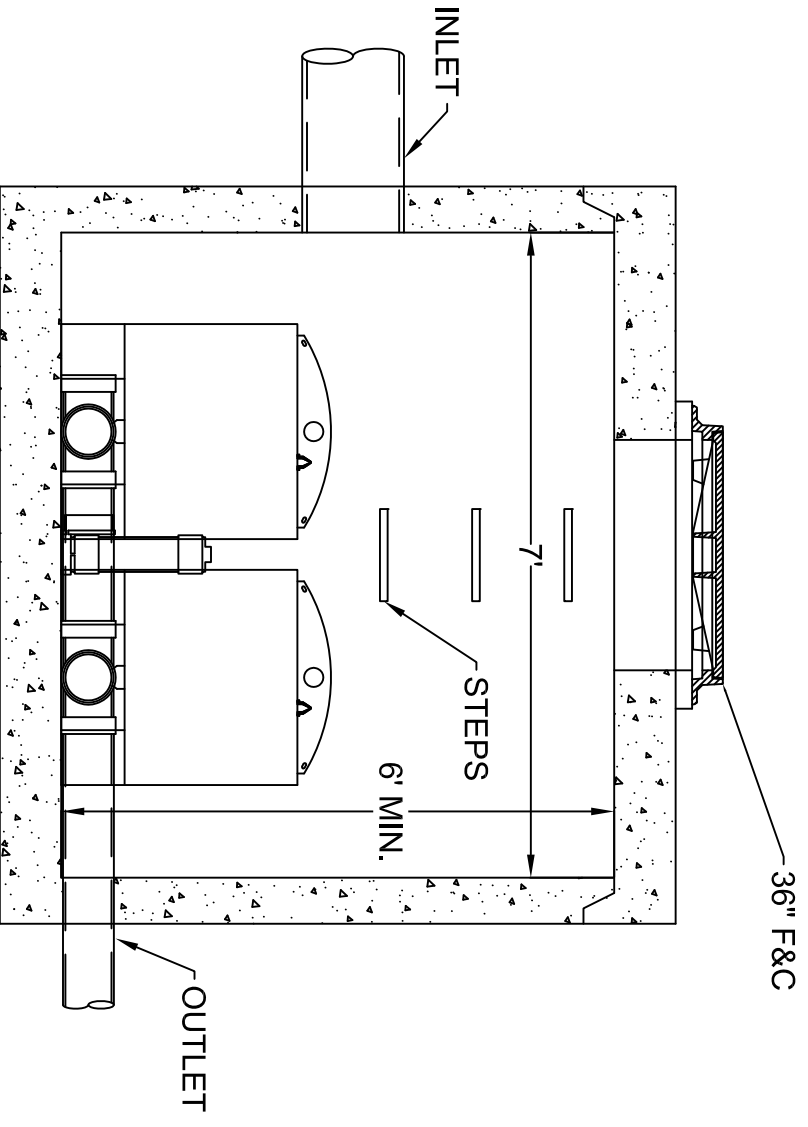

SHOWN WITH MINIMUM RECOMMENDED INSIDE VAULT HEIGHT. IF A SHALLOWER INSTALLATION IS REQUIRED, CONTACT YOUR LOCAL SALES REPRESENTATIVE.



4640 TRUEMAN BLVD
HILLIARD, OH 43026
1-800-733-7473



1030 Deer Hollow Drive 1-800-BAYSAYER
Mount Airy, MD 21771 1-800-229-7283

REV	DRW	CHK	DESCRIPTION

DATE: ---	DRAWN: --
PROJECT #: ---	CHECKED: ---