



PLANVIEW  
OVERLAY  
HERE

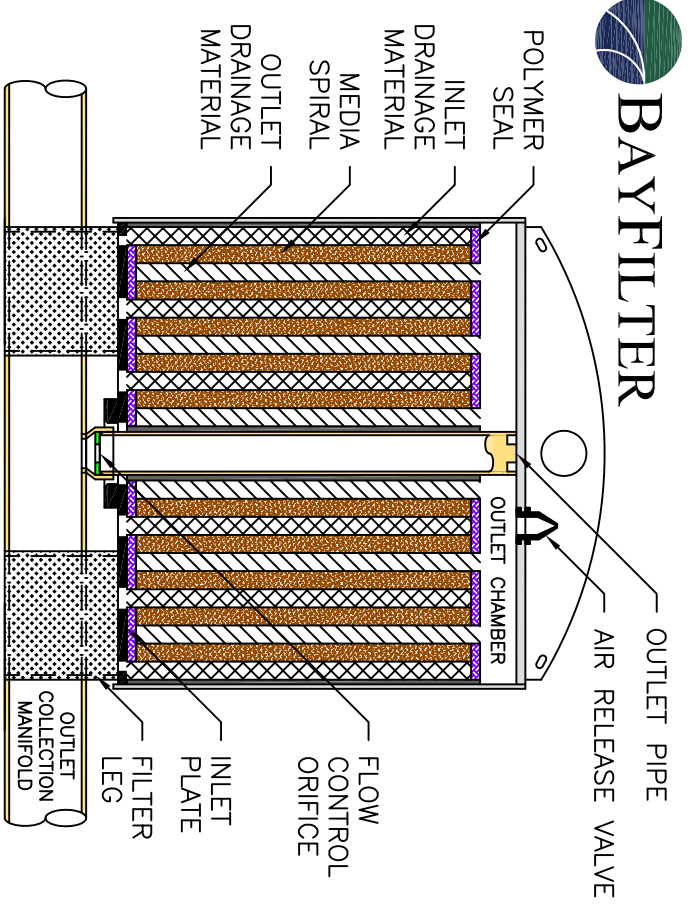

<b>BAYFILTER 545</b>	
8-14-10 VAULT	
PROJECT	
LOCATION	
WATER QUALITY FLOW	1.00 CFS
DRAINAGE AREA	
CARTRIDGE DESIGN FLOW RATE	45 GPM
# BAYFILTER CARTRIDGES	10
TREATED SEDIMENT CAPACITY	3500 LBS

THE BAYFILTER STORMWATER MANAGEMENT SYSTEM IS A STORMWATER FILTRATION DEVICE DESIGNED TO REMOVE FINE SEDIMENTS, HEAVY METALS, AND PHOSPHORUS. THE BAYFILTER SYSTEM RELIES ON A SPIRAL WOUND MEDIA FILTER CARTRIDGE WITH APPROXIMATELY 90 SQUARE FEET OF FILTRATION AREA. THE FILTER CARTRIDGES ARE HOUSED IN A CONCRETE STRUCTURE THAT EVENLY DISTRIBUTES THE FLOW BETWEEN CARTRIDGES. THE SYSTEM IS IN LINE WITH AN INTERNAL BYPASS WEIR THAT ROUTES HIGH INTENSITY STORMS AROUND THE CARTRIDGES. THE FILTER CARTRIDGES REMOVE POLLUTANTS FROM RUNOFF BY FILTRATION (INTERCEPTION/ATTACHMENT) AND ADSORPTION.

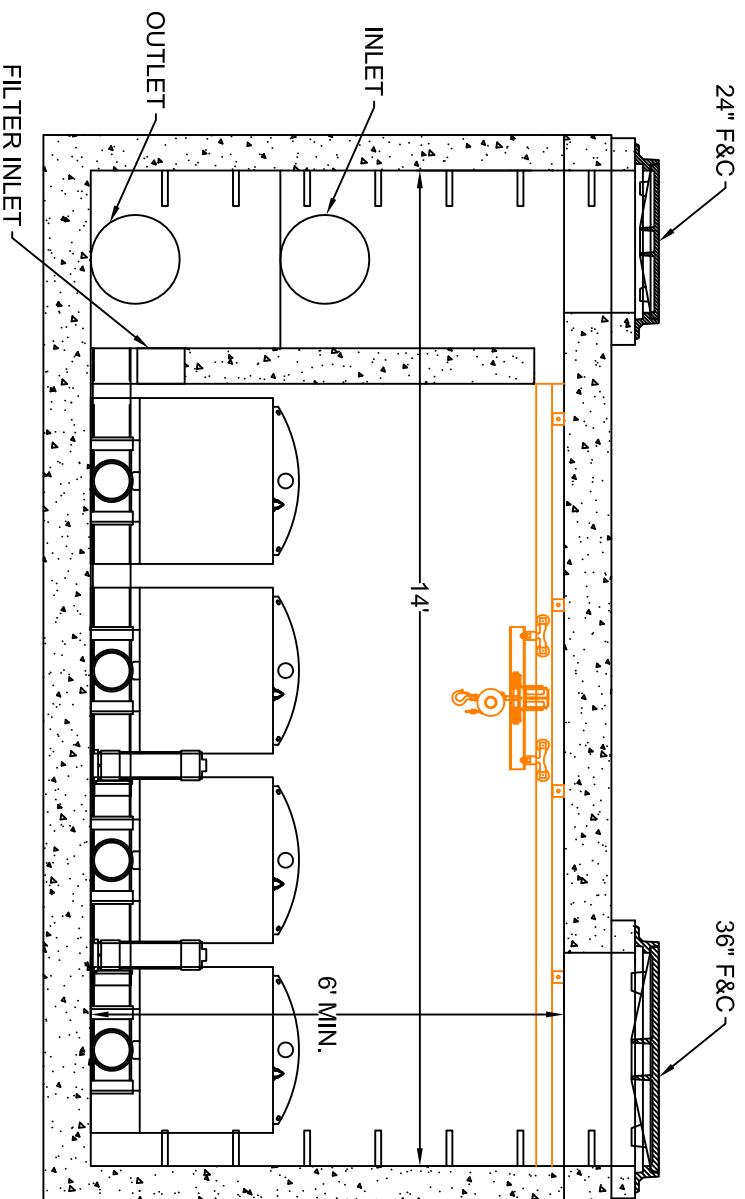

SHOWN WITH MINIMUM RECOMMENDED INSIDE VAULT HEIGHT. IF A SHALLOWER INSTALLATION IS REQUIRED, CONTACT YOUR LOCAL SALES REPRESENTATIVE.



4640 TRUAMAN BLVD  
HILLIARD, OH 43026  
1-800-733-7473



1030 Deer Hollow Drive 1-800-BAYSAVER  
Mount Airy, MD 21771 1-800-229-7283

REV	DRW	CHK	DESCRIPTION

DATE: ---	DRAWN: ---
PROJECT #: ---	CHECKED: ---